

ryolitte

the flattering finish

INTERIOR • EXTERIOR
Natural Architectural Finish

suitable for the following applications:

FLOORS

WALLS

CEILINGS

masonry finish • gypsum board
fiber cement board • EIFS

Altamira[®]

Mineral Paint

premium decorative finishes

BREATHABLE FINISH

no blistering or bubbling

EXCELLENT ADHESION

no peeling or chalking

EXCELLENT WEATHERABILITY

uniform non-fading colors with abrasion
resistance & low water-absorption

HEALTH & ENVIRONMENT FRIENDLY

odorless, non-toxic, non-flammable

ALKALI RESISTANCE

unique formula is modified to reduce
the effects of efflorescence and alkali attack

*Why you should choose
Altamira:*



NO PEELING



NO WRINKLING



NO FADING




NO CHALKING



NO EFFLORESCENCE



NO BLISTERING

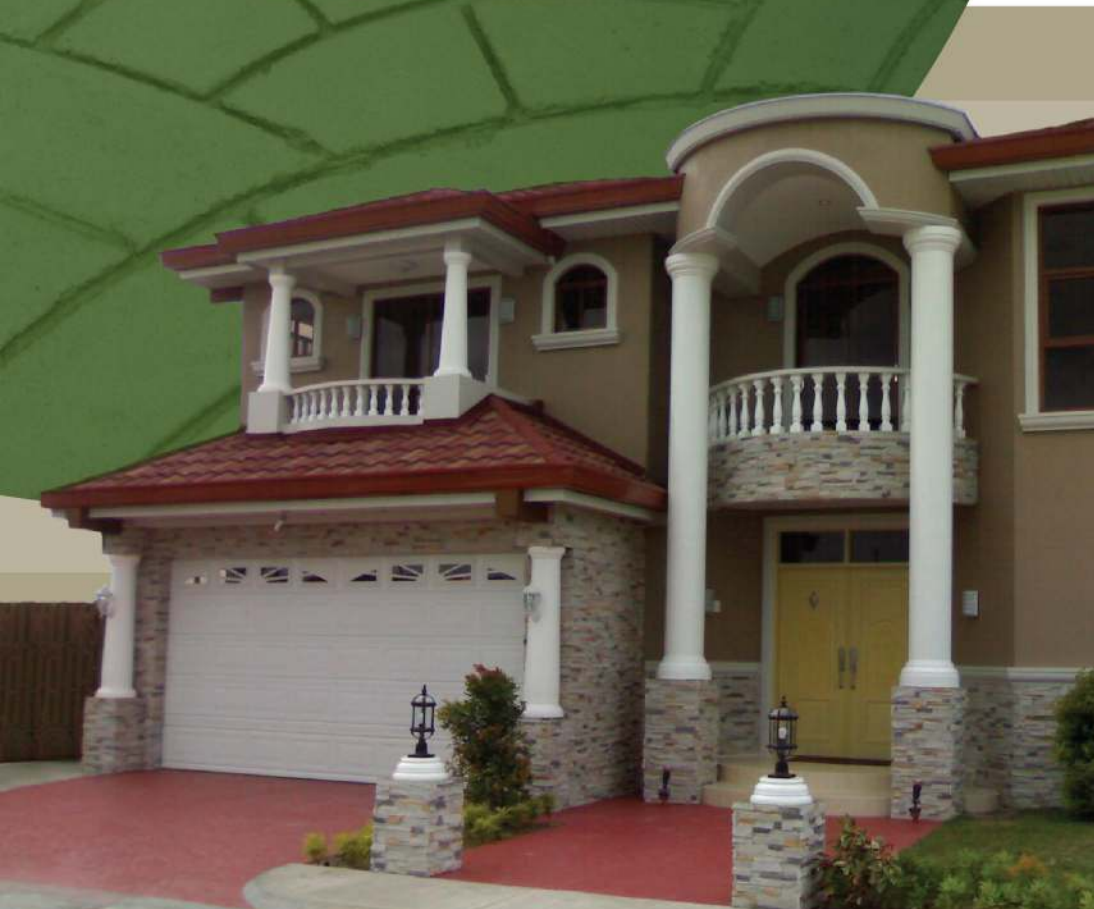



beautify an empty firewall



set a rich mood in interiors



apply to walls & ceilings




get creative & paint over concrete patterns

The Ryolitte Finish series is a smooth, flexible paint alternative for walls, floors, and ceilings. It is a 2-component cementitious, polymer-modified powder mixture available in a variety of pre-mixed matte colors.

REDUCED STEPS, REDUCED COST

Count the steps and count the savings.

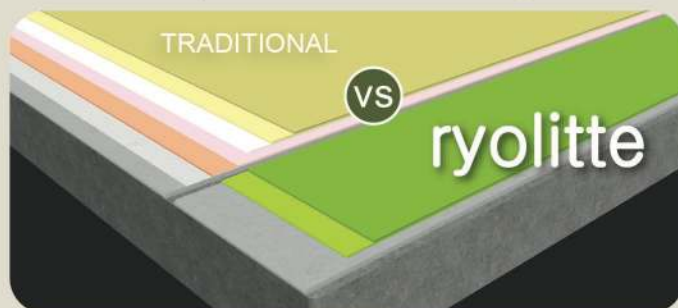

- | | | |
|-----------------------|---|-------------------------|
| Smooth Plaster Finish | 1 | Smooth / Stucco Plaster |
| Concrete Neutralizer | 2 | Ryolitte Finish (1st) |
| Primer | 3 | Ryolitte Finish (2nd) |
| Putty Compound | 4 | Top Coat (floor only) |
| Sanding | 5 | |
| Color Coat (1st) | 6 | |
| Color Coat (2nd) | 7 | |


EASY TO USE

Simply mix components to a workable consistency.

BASIC MIXING



BASIC APPLICATION

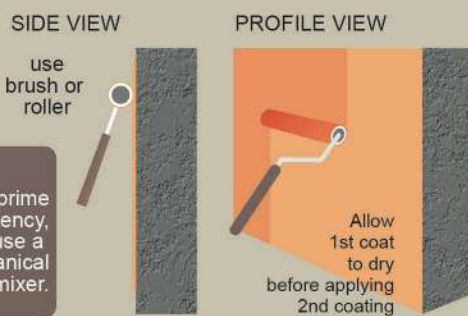

Betonit Products Phils, Inc.

www.betonitproducts.com

www.altamirafinishes.com

Distributed by:

WORKING Properties	Results	
Coverage per Set, 2 coats	25 m ²	
Potlife	2 hours	
*Coverage may vary depending on condition of substrate, design detail, and application technique.		
PERFORMANCE Properties	Test Method	Results
Wet-Scrub Resistance	German DIN53778	>2500 cycles
Tensile Adhesion Strength on Concrete, 14d SC	EN1348	>1.0 N/mm ²
Tensile Adhesion Strength on Concrete, 7d SC + 7d 70oC + 1d SC	EN1348	>1.0 N/mm ²
Tensile Adhesion Strength on Concrete, 7d SC + 21d in water	EN1348	<0.3 kg*mmh0.5
Water Absorption Coefficient, 24 hours	German DIN52617	