

toscanna

the smooth finish

INTERIOR APPLICATIONS
Natural Architectural Finish

suitable for the following applications:

WALLS

CEILINGS

masonry finish • gypsum board
fiber cement board • EIFS

Altamira[®]

Mineral Paint

premium decorative finishes

BREATHABLE FINISH

no blistering or bubbling

EXCELLENT ADHESION

no peeling or chalking

EXCELLENT WEATHERABILITY

uniform non-fading colors with abrasion
resistance & low water-absorption

HEALTH & ENVIRONMENT FRIENDLY

odorless, non-toxic, non-flammable

ALKALI RESISTANCE

unique formula is modified to reduce
the effects of efflorescence and alkali attack

*Why you should choose
Altamira:*



NO PEELING



NO FADING



NO BLISTERING



NO WRINKLING



NO CHALKING





fused




marmoreal



plugged



rodillo

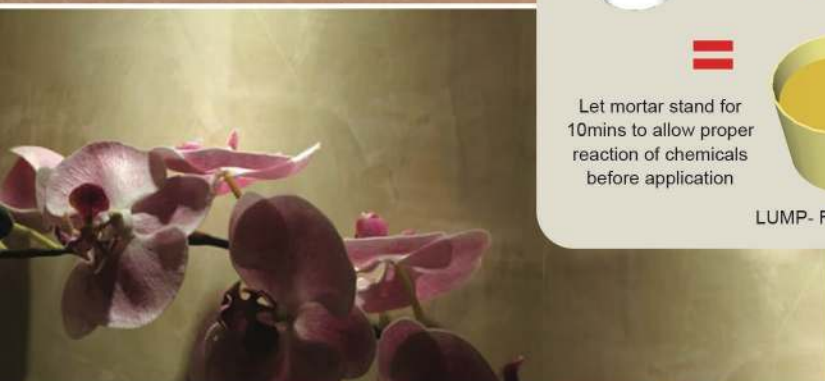

Toscanna is a decorative wall plaster that has a natural polished finish. It can be applied in a variety of faux marbled or distressed designs.

REDUCED STEPS, REDUCED COST

Count the steps and count the savings.



- | | | |
|-----------------------|---|-----------------------|
| Smooth Plaster Finish | 1 | Smooth Plaster Finish |
| Concrete Neutralizer | 2 | Toscanna Finish (1st) |
| Primer | 3 | Toscanna Finish (2nd) |
| Patching / Putty | 4 | Sealer (optional) |
| Sanding | 5 | |
| Primer (optional) | 6 | |
| Color Coat (1st) | 7 | |
| Color Coat (2nd) | 8 | |

EASY TO USE

Simply mix components to a workable consistency

* tools and steps may differ depending on design detail

BASIC MIXING




=
Let mortar stand for 10mins to allow proper reaction of chemicals before application



LUMP-FREE LIQUID

For prime consistency, use a mechanical mortar mixer.

BASIC APPLICATION

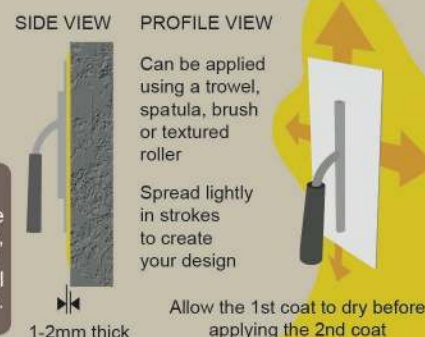

WORKING Properties	Results
Water Demand	0.42 liters/kg
Coverage, 2 coats	1 kg/m ²
Drying Time	3 hours
Potlife	6 hours

*Coverage may vary depending on condition of substrate, design detail, and application technique.

Distributed by:

BetonitTM

Betonit Products Phils, Inc.

www.betonitproducts.com

www.altamirafinishes.com