



WATER-BASED
PENETRATING SEALER

Betonit Grout Sealer is a water-based penetrating sealer for cementitious tile grout. Improve the appearance of your floors while reducing cleaning time and costs.

applications

- This ready-to-use, water-based formula penetrates, bonds with and protects porous tile grout.
- It may also be used to seal plaster, cement mortar, concrete and other porous masonry surfaces

advantages

BETTER-LOOKING FLOORS AND WALLS

- Preserves natural look of color of grout
- Creates an invisible shield that helps protect tile grout from getting dirty or stained by resisting liquid penetration
- Protects against mildew and growth

FASTER AND EASIER ROUTINE CLEANING

- Invisible shield helps prevent water-based stains from soaking into the grout, making mopping quick and easy

FRESHER-SMELLING FLOORS

- Protects against odor-causing mildew

EASY TO APPLY

- Can be applied 12 hours after grouting
- Can be applied on wet or damp surfaces

USE PROTECTIVE
WEAR



SHAKE WELL
BEFORE USING



STORE IN COOL
DRY PLACE



SHELF LIFE



How to use:

SURFACE PREPARATION: Tile grout or masonry surface must be fully-cured and clean. Make sure it is free from standing water, surface dirt, dust, loose materials, oils and other chemicals.

Apply Grout Sealer at least 12 hours after grouting. Use a bristle brush, preferably just a little wider than the grout line for maximum coverage. Repeat application until the liquid sealer is not easily absorbed by the grout.




- Allow 24 hours curing time before exposure to water or foot traffic. For maximum sealing performance extend curing time to 7 days.

IMPORTANT NOTE: Make sure that the surface is fully-cured, clean and dry prior to applying protector. A test application is necessary on surface to be treated to ensure compatibility and desired results.

HOW IT WORKS:

- 1) Sealer lines the pores of the surface without filling or blocking it, to prevent liquid absorption while allowing grout material to "breathe" (water vapor permeable).
- 2) Also, it coats the surface to repel water as seen by the "BEADING" effect.

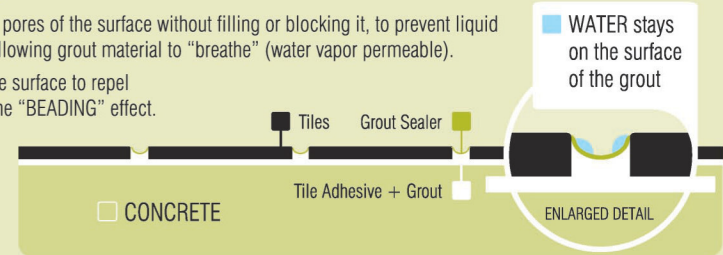

COVERAGE FOR TILED SURFACES: 12.5 sqm of grouted area

COVERAGE FOR MASONRY SURFACES: 2.5 sqm (at 10sqm/L per coat)

penetrates and protects